

GOVERNMENT OF NATIONAL CAPITAL TERRITORY OF DELHI
HEADQUARTERS, DELHI FIRE SERVICE, CONNAUGHT PLACE
NEW DELHI-110001

No. F.6/DFS/MS/EH/SZ/2018/ 1828

Dated: 6/8/18

FIRE SAFETY CERTIFICATE

Certified that M/s **The Fatty Bao Restaurant** (A Division of Olive Café South Pvt. Ltd) at Sangam Courtyard, Plot No-9, Sector-9, R.K. Puram, New Delhi-110022, located at 2nd Floor of the building comprised of three basements, ground plus two upper floors was issued Fire Safety Certificate by this department vide letter No. F.6/MS/DFS/EH/2015/SZ/1177 dated 06/07/2015. The premises was re-inspected by the officer concerned of this department on 25/07/2018 in the presence of Mr. Sumer Singh (Manager) of the restaurant and found that said premises have deemed complied with the fire prevention and fire safety requirements in accordance with rule 33 of the Delhi Fire Service Rules, 2010 and that the premises is fit for occupancy class "**Assembly, Group-D**" (Restaurant) with effect from the date of issue of this certificate for a period of **three years** in accordance with rule 36 unless renewed under rule 37 or sooner cancelled under Rule 40 and subject to compliance of the conditions under rule 38 of the Delhi Fire Service Rules, 2010

Issued on 6/8/18 at New Delhi by

W
6/8
(Vipin Kental)
Chief Fire Officer
Ph: 011-23412225
JA

Copy to: -

1. Auth. signatory, M/s The Fatty Bao Restaurant (A Division of Olive Café South Pvt. Ltd), 2nd Floor, Sangam Courtyard, Plot No-9, Sector-9, R.K. Puram, New Delhi-110022
2. DHO, South MCD, Public Health Department, South Zone, Green Park, New Delhi-110016

Conditions for the validity of Fire Safety Certificate: -

1. All the means of escape/entry/exit shall be kept unlocked & free from any obstruction.
2. All the fire safety arrangement provided therein shall be maintained in good working condition at all time as seen during inspection. Any loss of life property due to non-functional fire safety measures shall be at the responsibility of the management.
3. All the staff members must know the correct method of operation of fire fighting system.
4. The owner / occupier shall submit a declaration every year in form 'K' provided in the first schedule of Delhi Fire Service Rules 2010. The form is available on www.dfs.delhigovt.nic.in
5. This fire safety certificate may not in any way be treated as regularization (Clause 2.8 of UBBL-2016) of unauthorized construction or Alteration (Clause 1.4.3 of UBBL-2016), if any.
6. The owner/occupier shall apply for renewal of this Fire Safety Certificate to the Director in form 'J' [sub rule (I) of rule 37] along with a copy of this Certificate, six month prior to its expiry.

INSPECTION REPORT				
1	Name & Address of the Building	M/s The Fatty Bao Restt. (A Division of Olive Café South Pvt. Ltd) at 2 nd Floor, Sangam Courtyard Mall, Plot No-9, Sector-9, R.K. Puram, New Delhi-110022		
2	Type of Occupancy	Assembly "Group-D" (Eating House)		
3	Building Comprised of	Three tier basements, ground + 02 upper floors.		
4	Type of Case	Renewal		
5	Details of Previous NOC	F.6/MS/DFS/EH/2015/SZ/1177 dated 06/07/2015		
6	Fire Safety Directives Letter No	F.6/DFS/MS/BP/2010/1304 dated 04.05.2010		
7	Date of Inspection	25-07-2018		
8	Name of the Inspecting Officers	Mehmood, ADO (SJ)		
9	Name & Designation of Officers from the building side	Mr. Sumer Singh (Manager)		
10	Year of construction	2014 Restt located at 2 nd floor of the building.		
11	Applicant letter No.	Outdoor Diary No. 9643 dated 05.07.2018		
S. No.	Minimum standards on Fire Prevention and Fire Safety U/R 33	Old NOC requirements	Provided at Site	Remarks MR/NMR
1	Access to Building.	F6/DFS/MS/SZ/Cinema/2017/1725 Dt. 01/12/2017		
	<ul style="list-style-type: none"> Road width Gate width Width of internal road 	Restt. within Commercial Complex Bldg	As above As above As above	MR -NA- -NA-
2	Number, width, type & arrangement of exits.	Provided & Maintained by Bldg Mgmt		
	a) Number of Staircase	Provided & Maintained by Bldg Mgmt		
	➤ Upper floors.	02 Nos	As above	MR
	➤ Basement floor.	-NA-	As above	-NA-
	b) Width of Staircase	Provided & Maintained by Bldg Mgmt		
	➤ Upper floors	2 mtr	As above	MR
	➤ Basement floor	-NA-	As above	-NA-
	c) Protection of exits	Provided & Maintained by Bldg Mgmt		
	➤ Fire check door	Required	As above	MR
	➤ Pressurization	Required	As above	MR
	d) No. of continuous staircase to terrace	Required	As above	MR
	e) Width of corridor	2 mtr	As above	MR
	f) Door size	2 exit (2m/1m)	2m x 1 & 1m x 2	MR
3	Compartmentation.	Provided & Maintained by Bldg Mgmt		
	<ul style="list-style-type: none"> Fire check door. Sealing of electrical shafts. Fire rating of shaft door. Water curtain Fire dampers. 	Required	As above	MR
		Required	As above	MR
		Required	As above	MR
		-NA-	As above	-NA-
		-NA-	As above	-NA-
4.	Smoke Management system.	Provided & Maintained by Bldg Mgmt		
	<ul style="list-style-type: none"> Basement Upper floors 	30 ACPH	As above	MR
		12 ACPH	Provided	MR
5.	Fire Extinguishers.	Provided & Maintained by Bldg Mgmt		
	<ul style="list-style-type: none"> Total numbers Types ISI Marking 	Required	06 Nos	MR
		ABC / CO2	ABC type	MR
		ISI marked	Provided	MR
6.	First Aid Hose Reels.	Provided & Maintained by Bldg Mgmt		
	<ul style="list-style-type: none"> Total numbers on each floor. Length of hose-reel hose. Nozzle Diameter 	Required	02 Nos near Restt	MR
		30 mtr	Provided	MR
		5 mm	Provided	MR

The Fatty Bao Restt at 2nd Floor, Sangam Courtyard Mall, Plot No-9, Sec-9, RK Puram, New Delhi

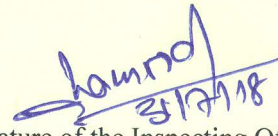
		Provided & Maintained by Bldg Mgmt		
7	Automatic fire detection & alarming system.	Required	Smoke & Heat	MR
	<ul style="list-style-type: none"> Type of detectors Location of Main Panel Location of Repeater Panel Alternate source of power Hooter's location 	Required	Ground floor	MR
		Required	FCR	MR
		Required	Provided	MR
		Required	Provided	MR
8.	MOEFA	Required	Provided	MR
9.	Public Address System	-NA-	As above	-NA-
10.	Automatic Sprinkler System	Provided & Maintained by Bldg Mgmt		
	<ul style="list-style-type: none"> Basement Upper floors. / Restt. Area Sprinkler above false ceiling 	-NA-	As above	-NA-
		Required	As above	MR
		-NA-	As above	-NA-
11.	Internal Hydrants.	Provided & Maintained by Bldg Mgmt		
	<ul style="list-style-type: none"> Size of Riser/Down-comer Number of Hydrant per floor Hose box. 	Required	As above	MR
		Required	As above	MR
		Required	As above	MR
12.	Yard Hydrants.			
	<ul style="list-style-type: none"> Total number of hydrants. Hose box. 	Required	As above	MR
		Required	As above	MR
13.	Pumping arrangements.	Fire fighting system is common for entire complex		
	<ul style="list-style-type: none"> Ground Level <ul style="list-style-type: none"> Discharge of main pump. Head of main pump. Number of main pumps. Jockey Pump output. Jockey Pump head. Standby Pump output. Standby Pump head. Auto Starting/Manual Stopping. Pump house access. Terrace Level <ul style="list-style-type: none"> Discharge of pump. Head of pump. Power supply. Auto starting of pump. 	2850 LPM	2850 LPM	MR
		70m	70m	MR
		02 Nos	02 Nos	MR
		180 LPM	180 LPM	MR
		70m	70m	MR
		2850 LPM	2850 LPM	MR
		70m	70m	MR
		Required	Provided	MR
		Required	Provided	MR
		-NA-	-NA-	-NA-
		-NA-	-NA-	-NA-
		-NA-	-NA-	-NA-
		-NA-	-NA-	-NA-
14.	Captive water storage for fire fighting.	Fire fighting system is common for entire complex		
	<ul style="list-style-type: none"> Underground tank capacity. <ul style="list-style-type: none"> Draw-off connection. Fire Service Inlet. Access to tank. Overhead tank capacity. 	Required	2,00,000 Ltr	MR
		Required	Provided	MR
		Required	Provided	MR
		Required	Provided	MR
		5,000 Ltr	20,000 Ltr	MR
		Required	Provided	MR
15.	Exit Signage.			
16.	Provision of Lifts.	Provided & Maintained by Bldg Mgmt		
	<ul style="list-style-type: none"> Pressurization of lift shaft. Pressurization of lift lobby. Communication in lift car. Fireman's switch. Lift signage. 	Required	As above	MR
		Required	As above	MR
		Required	As above	MR
		Required	As above	MR
		Required	As above	MR
17.	Standby Power Supply	Required	Provided (DG Set)	MR
18.	Refuge Area			
	<ul style="list-style-type: none"> Total area Location 	-NA-	-NA-	-NA-
		-NA-	-NA-	-NA-

The Fatty Bao Restt at 2nd Floor, Sangam Courtyard Mall, Plot No-9, Sec-9, RK Puram, New Delhi

19.	Fire Control Room.	Provided & Maintained by Bldg Mgmt			
		• Detector system panel.	-NA-	As above	-NA-
		• Flow switch panel.	-NA-	As above	-NA-
		• PA system panel.	-NA-	As above	-NA-
		• Battery backup.	-NA-	As above	-NA-
	• Building floor plan.	-NA-	As above	-NA-	
20.	Special Fire Protection System for the Protection of special Risk, if any.	-NA-	-NA-	-NA-	

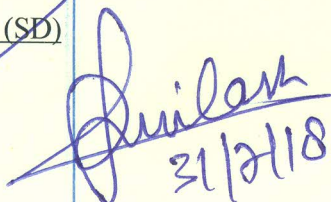
The fire protection system provided in the building/ premises were checked/ operated at random and found functional at the time of inspection. Keeping in view of the deemed compliance of the minimum standards of fire prevention and fire safety measures as required under the rules, the FSC issued vide letter No. F.6/MS/DFS/EH/2015/SZ/1177 dated 06/07/2015, renewal under rule 37 of the Delhi Fire Service Rules 2010, is recommended.

Accordingly DFA is put up for approval and signature please.

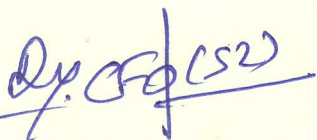

 Signature of the Inspecting Officer
 Name: Mehmood
 Design: ADO (SJ)


The Fatty Bao Restt at 2nd Floor, Sangam Courtyard Mall, Plot No-9, Sec-9, RK Puram, New Delhi

DO (SD)


31/7/18

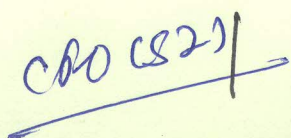



D.P. Singh (S2)

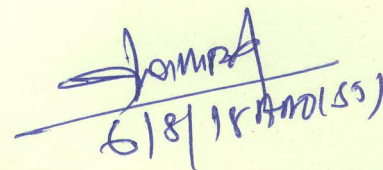

4/8

CFO SPT M-SCM FTB.
4/2/18

A. D. T. letter for us for signature please


CPO (S2)

M. SCM 6/8/18


6/8/18 Anand (SS)