



GOVERNMENT OF NATIONAL CAPITAL TERRITORY OF DELHI
HEADQUARTERS: DELHI FIRE SERVICE: CONNAUGHT PLACE
NEW DELHI-110001


No. F.6/DFS/MS/EH/2023/SZ/ 221

Dated..12/07/2023

FIRE SAFETY CERTIFICATE

Certified that the Eating House in the Name & Style of **M/s YOU MEE** located at **R-04A, Upper Ground Floor, Epicuria TDI South Bridge, Nehru place Metro Station, New Delhi 110019** in the building comprised of Basement, Lower Ground & Upper Ground Floor owned/occupied by **A Unit of Lite Bite Foods Pvt Ltd** have complied with the fire prevention and fire safety requirements in accordance with Rule 33 of the Delhi Fire Service Rules, 2010 and verified by the officers concerned of this department on 06/07/2023 in the presence of **Mr. Govind Thapa (Manager)** and that the premises is fit for occupancy class **"Group-D Assembly Building"** (Restaurant at Upper Ground Floor) and validity upto **31/03/2026** in accordance with rule 36 unless renewed under rule 37 or sooner cancelled under Rule 40 and subject to compliance of the conditions under rule 38 of the Delhi Fire Service Rules, 2010.

Issued on 12 / 07 / 2023 at New Delhi by


(ATUL GARG)
DIRECTOR
DELHI FIRE SERVICE

Copy to: -

1. The Dy. Health Officer, Public Health Department, South Zone, Green Park, Delhi-110016.(Ref. MHA Portal ID 2023062811701 dated 28/06/2023)

Conditions for the validity of Fire Safety Certificate: -

1. All the means of escape/entry/exit shall be kept free from any obstruction.
2. All the fire safety arrangement provided therein shall be maintained in good working condition at all time as seen during inspection. Any loss of life property due to non-functional fire safety measures shall be at the responsibility of the management.
3. All the staff members must know the correct method of operation of fire fighting system.
4. The owner/occupier shall submit a declaration every year in form 'K' provided in the first schedule of Delhi Fire Service Rules 2010. The form is available on www.dfs.delhigovt.nic.in
5. This fire safety certificate may not in any way be treated as regularization (Clause 2.8 of UBBL-2016) of unauthorized construction or alteration (Clause 1.4.3 of UBBL-2016), if any.
6. "The owner/occupier shall apply for renewal of this Fire Safety Certificate to the Director in form 'J' [sub rule (I) of rule 37] along with a copy of this Certificate, six month prior to its expiry."

INSPECTION REPORT

1	Name & Address of the Building	M/s YOU MEE (A Unit of Lite Bite Foods Pvt Ltd) at R-04A, Upper Ground Floor, Epicuria TDI South Bridge, Nehru place Metro Station, New Delhi 110019		
2	Type of Occupancy	Group-D Assembly Building, Eating house at UGF only		
3	Building Comprised of	Basement, Lower ground floor & upper ground floor		
4	Type of Case	New Case		
5	Details of Previous NOC	Nil		
6	Fire Safety Directives Letter No	F6/DFS/MS/2022/SZ/434 dated 29/09/2022 (Mall NOC)		
7	Date of Inspection	06/07/2023		
8	Name of the Inspecting Officers	DO (South) & ADO (BCP)		
9	Name & Designation of Officers from the building side	Mr. Govind Thapa		
10	Year of construction	2009		
11	Applicant letter No.	MHA Portal ID 2023062811701 dated 28/06/2023		
S. No.	Minimum standards on Fire Prevention and Fire Safety U/R 33	Old NOC Requirements	Provided at Site	Remarks MR/NMR
1	Access to Building.	Mall Noc F6/DFS/MS/2022/SZ/434 dated 29/09/2022		
	<ul style="list-style-type: none"> Road width Gate width Width of internal road 	30 mtr 6 mtr 6 mtr	Provided* Provided* Provided*	MR MR MR
2	Number, width, type & arrangement of exits.	Provided & Maintained by Mall		
	a) Number of Staircase	Provided & Maintained by Mall		
	➤ Upper floors.	02 Nos	04 Provided*	MR
	➤ Basement floor.	02 Nos	07 Provided*	MR
	b) Width of Staircase	Provided & Maintained by Mall		
	➤ Upper floors	1.50 mtr	1.80 mtr each	MR
	➤ Basement floor	1.50 mtr	1.80 mtr each	MR
	c) Protection of exits	Provided & Maintained by Mall		
	➤ Fire check door	Required	Provided*	MR
	➤ Pressurization	Required	Provided*	MR
	d) No. of continuous staircase to terrace	Required	Provided*	MR
	e) Width of corridor	Required	Provided*	MR
	f) Door size	1.50m x 2	1.50 m & 1.50m	MR
3	Compartmentation.	Provided & Maintained by TDI Mall		
	<ul style="list-style-type: none"> Fire check door. Sealing of electrical shafts. Fire rating of shaft door. Water curtain Fire dampers. 	Required Required Required N/A N/A	Provided* Provided* Provided* N/A N/A	MR MR MR N/A N/A
4	Smoke Management system.	Provided & Maintained by Mall		
	<ul style="list-style-type: none"> Basement Upper floors 	30 ACPH 12 ACPH	Provided* Provided*	MR MR
5	Fire Extinguishers.	Provided & Maintained by TDI Mall		
	<ul style="list-style-type: none"> Total numbers Types ISI Marking 	06 Nos ABC/CO ₂ ISI marked	10 Nos ABC-07 & CO ₂ -03 Provided	MR MR MR
6	First Aid Hose Reels.	Provided & Maintained by TDI Mall		
	<ul style="list-style-type: none"> Total numbers on each floor. Length of hose-reel hose. Nozzle Diameter 	04 Nos each 30m 5mm	Provided* Provided* Provided*	MR MR MR
7	Automatic fire detection & alarming system.	Provided & Maintained by Mall		
	<ul style="list-style-type: none"> Type of detectors Location of Main Panel Location of Repeater Panel Alternate source of power 	N/A N/A Required Required	Provided* Provided* Provided* Provided*	MR MR MR MR

	• Hooter's location	Required	Provided*	MR
8	MOEFA	Required	Provided	MR
9	Public Address System	N/A	N/A	N/A
10	Automatic Sprinkler System	Provided & Maintained by TDI Mall		
	• Basement	Required	Provided*	MR
	• Ground floor.	Required	Provided*	MR
	• Sprinkler above false ceiling	Required	Provided*	MR
11	Internal Hydrants.	Provided & Maintained by Mall		
	• Size of Riser/Down-comer	Required	Provided*	MR
	• Number of Hydrant per floor	Required	Provided*	MR
	• Hose box.	Required	Provided*	MR
12	Yard Hydrants.			
	• Total number of hydrants.	Required	Provided*	MR
	• Hose box.	Required	Provided*	MR
13	Pumping arrangements.			
	• Ground Level	Provided & Maintained by Mall		
	➤ Discharge of main pump.	2280 LPM	Provided*	MR
	➤ Head of main pump.	70 m	Provided*	MR
	➤ Number of main pumps.	02	Provided*	MR
	➤ Jockey Pump output.	280 & 180 LPM	Provided*	MR
	➤ Jockey Pump head.	70 m	Provided*	MR
	➤ Standby Pump output.	2280 LPM	Provided*	MR
	➤ Standby Pump head.	70 m	Provided*	MR
	➤ Auto Starting/Manual Stopping.	Required	Provided*	MR
	➤ Pump house access.	Required	Provided*	MR
	• Terrace Level			
	➤ Discharge of pump.	N/A	N/A	N/A
	➤ Head of pump.	N/A	N/A	N/A
	➤ Power supply.	N/A	N/A	N/A
	➤ Auto starting of pump.	N/A	N/A	N/A
14	Captive water storage for fire fighting.	Provided & Maintained by Mall		
	• Underground tank capacity.	1,00,000 ltr	Provided*	MR
	➤ Draw-off connection.	Required	Provided*	MR
	➤ Fire Service Inlet.	Required	Provided*	MR
	➤ Access to tank.	Required	Provided*	MR
	• Overhead tank capacity.	10,000 ltr	Provided*	MR
15	Exit Signage.	Required	Provided	MR
16	Provision of Lifts.	Provided & Maintained by Mall		
	• Pressurization of lift shaft.	N/A	N/A	N/A
	• Pressurization of lift lobby.	N/A	N/A	N/A
	• Communication in lift car.	N/A	N/A	N/A
	• Fireman's switch.	N/A	N/A	N/A
	• Lift signage.	N/A	N/A	N/A
17	Standby Power Supply	Required	Provided	MR
18	Refuge Area			
	• Total area	N/A	N/A	N/A
	• Location	N/A	N/A	N/A
19	Fire Control Room.	Provided & Maintained by Mall		
	• Detector system panel.	Required	Provided*	MR
	• Flow switch panel.	Required	Provided*	MR
	• PA system panel.	Required	Provided*	MR
	• Battery backup.	Required	Provided*	MR
	• Building floor plan.	N/A	N/A	N/A
20	Special Fire Protection System for the Protection of special Risk, if any.	N/A	N/A	N/A


Note: - * provided & Maintained by Epicuria, Nehru place Metro Station, New Delhi 110019.


The fire protection system provided in the building were randomly checked and found functional at the time of inspection.

Further, the party has complied all the observation / Shortcoming already issued & communicated by this department vide letter of even no 324 dated 20/06/2023.


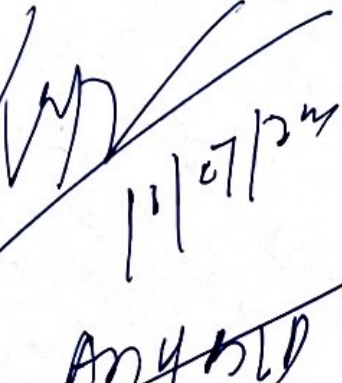
Keeping in view of the substantially satisfactory compliance of the minimum standards on fire prevention and fire safety measures as required under the rules, it is recommended to issue Fire Safety Certificate under rule 35 (3) of the Delhi Fire Service Rules, 2010

Accordingly, DFA is put up for approval and signature please.



Signature of the Inspection Officer
Name: Sh. Manoj Kumar Sharma
Design: DO (South)


Signature of the Inspecting Officer
Name: Sh. Rajesh Kumar
Design: ADO (BCP)

CFO (HQ)


11/7/2023
Director

11/07/23
Approved

As approved, F.S. letter is put up
for your signature pl


11/07/23
Director

on

104
11/7/23

uploaded
12/7/23
