



GOVERNMENT OF NATIONAL CAPITAL TERRITORY OF DELHI
HEADQUARTERS: DELHI FIRE SERVICE: CANNAUGHT PLACE
NEW DELHI- 110 001

No. F6/DFS/MS/School/2023/NDZ/ 827

Dated: 20/11/2023

FIRE SAFETY CERTIFICATE

Certified that Geeta Bal Bharti Sr. Sec. School located at Rajgarh Colony, Delhi-110031, building comprised of basement, ground plus three upper floors but school is running on ground floor, first floor, second floor & third floor (basement sealed) owned/occupied by Geeta Bal Bharti Sr. Sec. School was issued FSC vide letter No. F.6/DFS/MS/School/2018/423 dated 15/03/2018. The premises was re-inspected by the officer concerned of this department on dated 31/10/2023 in the presence of Mrs. Shalini, Principal, observed that all the fire prevention and fire safety arrangements provided in the premises found in good working condition. The premises have therefore deemed complied with rule 33 of Delhi Fire Service Rules, 2010 and that the building/premises is fit for occupancy class 'Educational (Group-B)' with effect from 20/11/2023. for a period of three years in accordance with rule 36 unless renewed under rule 37 or sooner cancelled under rule 40 and subject to compliance of the conditions under rule 38 of the Delhi Fire Service Rules, 2010 & also conditions printed below.

Issued on 20/11/2023..... at New Delhi by


(ATUL GARG)
DIRECTOR
DELHI FIRE SERVICE
o/c @

To:-

The Principal
Geeta Bal Bharti Sr. Sec. School located at Rajgarh Colony, Delhi-110031

Copy to:-

The Director of Education (Land & Estate)
Directorate of Education, Lucknow Road, Delhi-110054

Conditions for the validity of Fire Safety Certificate

1. Fire Safety Certificate is valid for ground floor, first floor, second floor & third floor only. Applicant has submitted an undertaking dated 04/09/2023 that he will not use basement for school purpose failing which this FSC should be treated null & void.
2. All the means of escape shall be kept free of all type of obstruction all the time.
3. All the employees shall be acquainted with the use and maintenance of all fire equipments and method of smooth and speedy safe evacuation of occupants in case of emergency.
4. All the fire fighting equipment shall be maintained in perfect working condition all the time and any lapse rendering non-functional of fire safety measures, management shall be responsible.
5. Any deviation, with regards to construction, ventilation, occupancy, electric installation etc. may be got verified from the concerned authorities.
6. This Fire Safety Certificate may not be treated in any case for regularizations of unauthorized construction /unauthorized use of land if any.
7. The owner / occupier shall submit a declaration every year in form 'K' provided in the first schedule of Delhi Fire Service Rule 2010. The form is available on www.dfs.delhigovt.nic.in
8. The owner / occupier shall apply for renewal of this Fire Safety Certificate of the Director in Form 'J' [sub rule (1) of rule (37)] along with a copy of this Certificate, Six Months prior to its expiry.

INSPECTION REPORT

1. Name & address of the building : Geeta Bal Bharti Sr.Sec.School, Rajgarh Colony
Delhi-110031
2. Building is comprised of : B+G+3(School running ground + 03 upper floor)
3. Type of Occupancy : Educational
4. Type of Case : Renewal
5. Details of Previous NOC letter : F.6/DFS/MS/School/2018/NDZ/423dt- 15/03/2018
6. Fire Safety direction letter No. : NBC Part- IV
7. Date of Inspection : 31/10/2023
8. Name of the Inspecting officers : ADO (LN) Yashwant Singh Meena
9. Name and designation of Officer
from the building side : Mrs. Shalini,Principal
10. Year of Construction : 1976
11. Applicant's email Id. : GBB/2023-24/127/741 dated 11/08/2023

Sr. No.	Minimum Standards on Fire Prevention and Fire Safety U/R33	NBC Part-IV Requirement	Provided at Site	Remarks MR/NMR
01	Access to Building			
	<ul style="list-style-type: none"> • Road width • Gate width • Width of internal road 	<ul style="list-style-type: none"> 06 m N/A N/A 	<ul style="list-style-type: none"> 10 m N/A N/A 	<ul style="list-style-type: none"> MR N/A N/A
02	Number, Width, Type and Arrangement of Exits			
	a. Number of Staircases			
	<ul style="list-style-type: none"> • Upper floor • Basement 	<ul style="list-style-type: none"> 03 nos. 02 nos. 	<ul style="list-style-type: none"> 03nos. 02 nos. 	<ul style="list-style-type: none"> MR MR
	B. Width of Staircases			
	<ul style="list-style-type: none"> • Upper floor • Basement 	<ul style="list-style-type: none"> 1.5 m 1.5 m 	<ul style="list-style-type: none"> 1.60 m,1.30 m & 2.10 m 1.5 m each 	<ul style="list-style-type: none"> MR MR
	c. Protection of Exits			
	<ul style="list-style-type: none"> • Fire check door • Pressurization 	<ul style="list-style-type: none"> N/A N/A 	<ul style="list-style-type: none"> N/A N/A 	<ul style="list-style-type: none"> N/A N/A
	d. No. of Continuous Staircases to Terrace	01 no.	01nos.	MR
	e. Width of Corridor	1.5 m	2.20 m	MR
	f. Door Size	1 m	1.10 m	MR
03	Compartmentation.			
	<ul style="list-style-type: none"> • Fire check door • Sealing of electrical shafts • Fire rating of shaft door • Water curtain • Fire dampers 	<ul style="list-style-type: none"> N/A N/A N/A N/A N/A 	<ul style="list-style-type: none"> N/A N/A N/A N/A N/A 	<ul style="list-style-type: none"> N/A N/A N/A N/A N/A
04	Smoke Management System.			
	<ul style="list-style-type: none"> • Basement • Upper floor 	<ul style="list-style-type: none"> Required N/A 	<ul style="list-style-type: none"> Provided N/A 	<ul style="list-style-type: none"> MR N/A
05	Fire Extinguishers			
	<ul style="list-style-type: none"> • Total numbers • Types • IS marking 	<ul style="list-style-type: none"> 45 nos. ABC/CO₂ ISI marked 	<ul style="list-style-type: none"> 45 nos. ABC/ CO₂ ISI marked 	<ul style="list-style-type: none"> MR MR MR

②

06	First-Aid-Hose Reels.			
	Total numbers on each floor	02 nos.	02 nos.	MR
	• Length of hose reel hose	30 m	30 m	MR
	• Nozzle diameter	5 mm	5 mm	MR
07	Automatic Fire Detection and Alarming System.			
	• Type of detectors	N/A	N/A	N/A
	• Location of main panel	N/A	N/A	N/A
	• Location of repeater panel	N/A	N/A	N/A
	• Alternate source of power	N/A	N/A	N/A
	• Hooter	N/A	N/A	N/A
08	MOEFA	N/A	N/A	N/A
09	Public Address System.	N/A	N/A	N/A
10	Automatic Sprinkler System.			
	• Basement (Sealed)	N/A	N/A	N/A
	• upper floor	N/A	N/A	N/A
	• sprinkler above false ceiling	N/A	N/A	N/A
11	Internal Hydrants			
	• size of riser/down-comer	N/A	N/A	N/A
	• Number of hydrants per floor	N/A	N/A	N/A
	• Hose box	N/A	N/A	N/A
12	Yard Hydrants.			
	• Total number of hydrants	N/A	N/A	N/A
	• Hose box	N/A	N/A	N/A
13	Pumping Arrangements.			
	➤ Ground Level			
	• Discharge of main pump	N/A	N/A	N/A
	• Head of main pump	N/A	N/A	N/A
	• Number of main pumps	N/A	N/A	N/A
	• Jockey pump out put	N/A	N/A	N/A
	• Jockey pump head	N/A	N/A	N/A
	• Standby pump out put	N/A	N/A	N/A
	• Standby pump head	N/A	N/A	N/A
	• Auto starting /manual stopping	N/A	N/A	N/A
	• Pump house access	N/A	N/A	N/A
	➤ Terrace Level			
	• Discharge of pump	2 X 450 LPM	450 LPM	MR
		40 M	40 M	MR
	• Head of the pump	Required	Provided	MR
	• Power supply	Required	Provided	MR
	• Auto starting of pump			
14	Captive Water Storage for Fire Fighting.			
	• Underground tank capacity	N/A	N/A	N/A
	• Draw-off connection	N/A	N/A	N/A
	• Fire service inlet	N/A	N/A	N/A
	• Access to tank	N/A	N/A	N/A
	• Overhead tank capacity	10,000 Ltrs.	10,000 Ltrs.	MR
15	Exit Signage.	Required	Provided	MR

(u)

30/

16	Provision of Lifts.			
	• Pressurization of lift shaft	N/A	N/A	N/A
	• Pressurization of lift lobby	N/A	N/A	N/A
	• Communication in lift car	N/A	N/A	N/A
	• Firemen's grounding switch	N/A	N/A	N/A
	• Lift signage	N/A	N/A	N/A
17	Standby Power Supply			
18	Refuge Area.			
	• Total area	N/A	N/A	N/A
	• Location	N/A	N/A	N/A
19	Fire Control Room			
	• Detector system panel	N/A	N/A	N/A
	• Flow switch panel	N/A	N/A	N/A
	• PA system panel	N/A	N/A	N/A
	• Battery backup	N/A	N/A	N/A
	• Building floor plans	N/A	N/A	N/A
20	Special Fire Protection Systems for Protection of Special Risks, if Any:			
		N/A	N/A	N/A

Note:- Building comprised of basement, ground plus three upper floor but management has given undertaking dated 04/09/2023 at C- 25 that they will not use basement for school purpose and any purpose in any case (Basement Sealed & photo attached). FSC is recommended for ground to third floor only


The fire protection systems provided in the building were tested/checked and found functional at the time of inspection.

Keeping in view the deemed compliance of the minimum standards on fire prevention and fire safety required under the rule. The FSC issued vide letter no. F.6/DFS/MS/School/2018/NDZ/423 dated 15/03/2018 renewal under rule 35 of the Delhi Fire Service Rule, 2010 is recommended.

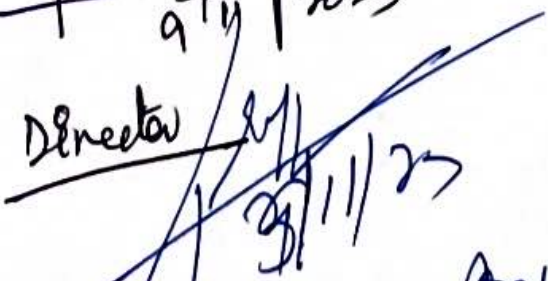

6/11/2023

Signature of the Inspecting Officer
Name :- Yashwant Singh Meena
Designation :- A.D.O (LN)

Dy. CFO(NDZ)


07/11/23

C.F/O.
9/11/2023


31/11/23

