## GOVERNMENT OF NATIONAL CAPITAL TERRITORY OF DELHI HEAÐ QUARTERS: ÐELHI FIRE SERVICE: CONNAUGHT PLACE NEW DELHI-110001

No.F.6 DFS/MS/School/2021/SZ/

883

Dated: 26 / 10 / 2021

· YU

## FIRE SAFETY CERTIFICATE

Certified that the Jose Marti Sarvodaya Vidyalaya, located at R. K Puram, Sector 12, New Delhi - 110022 comprised of Ground + Two Upper floors (Except Auditorium) owned / occupied by Directorate of Education, Govt. of Delhi was issued Fire Safety Certificate by this department vide letter No. F6/DFS/MS/School/2018/SZ/2246 Dated 05/10/2018. The said premises was re-inspected by officer concerned of this department on 18/10/2021 in presence of Karuna Sree Kunumuri (Principal) of the school and found that the said school building have deemed complied with the fire prevention and fire safety requirements in accordance with rule 33 of the Delhi Fire Services Rules 2010, and that the school building is fit for occupancy class "Educational Building" Group – B with effect from  $\Sigma_6 / (\circ / 2021$  for a period of Three years in accordance with rule 36 unless renewed under rule37 or sooner cancelled under Rule 40 and subject to compliance of the conditions under rule 38 of Delhi Fire Service Rules 2010.

Issued on 26/102021 at New Delhi by


(SUNIL CHAWDHARY) DY. CHIEF FIRE OFFICER (SZ)

Copy to: -

- 1. The Principal Jose Marti Sarvodaya Vidyalaya, R. K Puram, Sector 12, New Delhi 110022.
- 2. The Director of Education, Govt. of NCT of Delhi, Old Secretariat, New Delhi- 110054

## Conditions for the validity of Fire Safety Certificate:-

- 1. All the means of escape/entry/exit shall be kept free from any obstruction.
- 2. All the fire safety arrangements provided therein shall be maintained in good working condition at all time as seen during inspection. Any loss of life or property due to non-functional fire safety measures shall be at the responsibility of the management.
- 3. All the staff members must know the correct method of operation of firefighting system.
- 4. This certificate cannot be treated as regularization of unauthorized construction, if any.
- 5. The owner/ occupier shall submit a declaration every year in Form 'K' provided in the first schedule of Delhi Fire Service Rules 2010. The form is available on <u>www.dfs.delhigovt.nic.in</u>
- 6. "The owner/occupier shall apply for renewal of this Fire Safety Certificate to the Director in Form 'J' [sub rule (1) of rule 37] along with a copy of this Certificate, six months prior to its expiry."

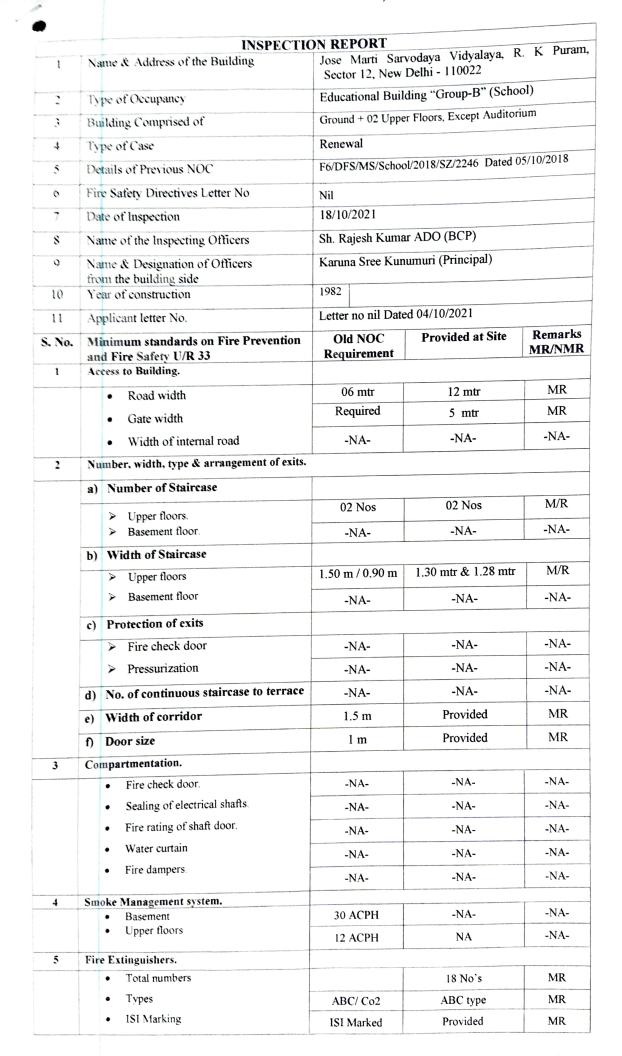

NIS

6	First Aid Hose Reels.     Total numbers on each floor.	02 No's	Provided & functional	MR
	<ul> <li>Length of hose-reel hose.</li> </ul>	30 m	Provided & functional	MR
	Nozzle Diameter	5 mm	Provided & functional	MR
7	Automatic fire detection & alarming system.			
	Type of detectors	-NA-	-NA-	-NA-
	Location of Main Panel	-NA-	-NA-	-NA-
	Location of Repeater Panel	-NA-	-NA-	-NA-
	• Alternate source of power	-NA-	-NA-	-NA-
	Hooter's location	-NA-	-NA-	-NA-
8	MOEFA	-NA-	NA	-NA-
9	Public Address System	-NA-	-NA-	-NA-
10	Automatic Sprinkler System			
	• Basement	-NA-	-NA-	-NA-
	• Upper floors	-NA-	NA	-NA-
	• Sprinkler above false ceiling	-NA-	-NA-	-NA-
11	Internal Hydrants.			
	Size of Riser/Down-comer	-NA-	100 mm	-NA-
	• Number of Hydrant per floor	-NA-	02	-NA-
	• Hose box.	-NA-	02	-NA-
2	Yard Hydrants.			
	• Total number of hydrants.	-NA-	-NA-	-NA-
	• Hose box.	-NA-	-NA-	-NA-
13	Pumping arrangements.			
	Ground Level			
	Discharge of main pump.	-NA-	-NA-	-NA-
	$\succ$ Head of main pump.	-NA-	-NA-	-NA-
	Number of main pumps.	-NA-	-NA-	-NA-
	Jockey Pump output.	-NA-	-NA-	-NA-
	Jockey Pump head.	-NA-	-NA-	-NA-
	Standby Pump output.	-NA-	-NA-	-NA-
	Standby Pump head.	-NA-	-NA-	-NA-
	Auto Starting/Manual Stopping.	-NA-	-NA-	-NA-
	Terrace Level			
	<ul> <li>Discharge of pump.</li> </ul>	450 LPM	Provided & functional	MR
	> Head of pump.	40 mtr	Provided & functional	MR
	> Power supply.	Required	Provided & functional	MR
	<ul><li>Auto starting of pump.</li></ul>	Required	Provided & functional	MR
14	Captive water storage for fire fighting.	-		
	Underground tank capacity.	-NA-	-NA-	-NA-
	> Draw-off connection.	-NA-	-NA-	-NA-
	Fire Service Inlet.	-NA-	-NA-	-NA-
	> Access to tank.	-NA-	-NA-	-NA-



15	Overhead tank capacity.	10,000 Ltrs	Provided & functional	MR
	Exit Signage.	Required	Provided	MR
16	Provision of Lifts.	quirea		
	<ul> <li>Pressurization of lift shaft.</li> <li>Pressurization of lift lobby.</li> <li>Communication in lift car.</li> <li>Fireman's switch.</li> </ul>	-NA-	-NA-	-NA-
		-NA-	-NA-	-NA-
		-NA-	-NA-	-NA-
		-NA-	-NA-	-NA-
	<ul> <li>Lift signage.</li> </ul>	-NA-	-NA-	-NA-
17	Standby Power Supply	NA	NA	NA
18	Refuge Area			
	Total area	-NA-	-NA-	-NA-
	Location	-NA-	-NA-	-NA-
19.	Fire Control Room.		- L	
	• Detector system panel.	-NA-	-NA-	-NA-
	• Flow switch panel.	-NA-	-NA-	-NA-
	• PA system panel.	-NA-	-NA-	-NA-
	Battery backup.	-NA-	-NA-	-NA-
	Building floor plan.	-NA-	-NA-	-NA-
20.	Special Fire Protection System for the Protection of special Risk, if any.		ABC type fire extinguishers provided near electric panel	-NA-

The fire protection system provided in the building were randomly checked and found functional at the time of inspection.

Further, the party has complied all the observation / Shortcoming already issued & communicated by this department vide letter of even no 440 dated 27/08/2021

Keeping in view of the deemed compliance of the minimum standard on fire prevention and fire safety measures as required under the rules, the FSC issued vide letter no F6/DFS/M\$/School/2018/SZ/2246 Dated 05/10/2018, renewal under rule 37 of the Delhi Fire Service rules, 2010 is recommended.

Accordingly, DFA is put up for approval and signature please

DO(8D)

Signature of the Inspecting Officer Name: Sh. Rajesh Kumar Design: ADO (BCP)

10