GOVERNMENT OF NATIONAL CAPITAL TERRITORY OF DELHI HEAD QUARTERS, DELHI FIRE SERVICE, NEW DELHI -110001

No.F6/DFS/MS/2022/ 39

Dated :..../2022

TOR

Delhi Fire Service

FIRE SAFETY CERTIFICATE

Certified that the C- Block Delhi High Court located at Shershah Suri Marg, New Delhi comprised of 2B + Ground + 04 Upper floors was earlier granted FSC/NOC by this department vide letter no. F6/DFS/MS/NDZ/2017/1393 dated 21/09/2017. Now, the premises was re-inspected by the officers concerned of this department on 17/01/22 in the presence of Sh. D.C.Gupta AE (E) & Sh A.K.Jha JE (E) and found that the said building has deemed complied with the fire prevention and fire safety requirements in accordance with rule 33 of the Delhi Fire Service Rules, 2010 and that the premises is fit for occupancy class E- Business Occupancy (Office Building) with effect from $-2.7/\omega l/22.29$ -for period of three years in accordance with rule 36 unless renewed under rule 37 or sooner cancelled under Rule 40 and subject to compliance of the conditions under rule 38 of the Delhi Fire Service Rules 2010 printed below.

Issued -----at New Delhi by.

Copy to:-

- 1. The Executive Engineer (E), M-451 PWD, DHC& ND/Central, New Delhi.
- 2. The Assistant Engineer (E)-4511, PWD, DHC& ND/Central, New Delhi.
- 3. The Chief Architect, Department of Architecture & Environs, New Delhi. Municipal Council, Palika Kendra, New Delhi.
- 4 The Chairman, BMCC, Delhi High Court, New Delhi.

Condition for the validity of fire safety certificate

- 1. All the fire safety arrangements provided therein shall be maintained in good working conditions at all times.
- 2. Any loss of life or property due to non functional fire safety measures shall be at the responsibility of the management.
- 3. The trained fire fighting staff should be available round the clock.
- 4. Any deviation w.r.t. construction etc. shall be verified by the concerned building sanctioning authority.
- 5. This fire safety certificate may not be treated in any case for regularization of unauthorized construction, if any.
- 6. The owner / occupier shall submit a declaration every year in form 'K' provided in the first schedule of Delhi Fire Service Rules 2010. The form is available on www.dfs.delhigovt.nic.in
- 7. The means of escape shall be kept unobstructed / unlocked for unhindered evacuation in case of an emergency.
- The owner/occupier shall apply for renewal of this Fire Safety Certificate to the Director in form 'J' [sub rule (I) of rule 37] along with a copy of this Certificate, six month prior to its expiry".
- 9. The basement shall be used as per building bye law concerned.

			MIL			
	INS	PECTION REP				
	1. Name & address of the build	ding C-Block.	Delhi High Court,	Shershah Suri		
		Marg, Ne	ew Delhi.	State State		
	Type of occupancy:-	Business				
			+ 04 Upper floors			
	3. Type of case:-	Renewal				
	4. Details of previous FSC:-	F6/DFS/MS	/NDZ/2017/1393 d	lated 21/09/17		
	5. Fire safety directives No	F6/DFS/	MS/BP/2013/70 da	ted 03/05/13		
	6. Date of inspection:-	17/01/22				
	7. Name of the inspecting offic	er:- Sh.Rajin	der Atwal (DO/CI			
	8 Name & designation of m	Sh. Ravin	nder Singh (ADO/	CC)		
	 Name & designation of offic From the building side:- 					
	9. Year of construction:-	-	ta AE (E) & Sh. A.K.J	ha JE (E)		
1	0 4-1.	2014-15		10 101		
	Ppriount 5 letter 140;-	23(08)/AE(E)/ 4511/2021 22/2	PWD/DHC & ND 348 dated 20.12.21	Central/M-		
S.	Minimum Standards on fire	Requirement		Remarks		
No.	Prevention and fire safety	NBC-IV	Provided at site	MR/NMR		
	U/R 33	NDC-IV		IVIR/INIVIR		
1	Access to Building					
	1) Road width	06 mtr.	12 mtr.	MR		
	2) Gate width	05 mtr.	05 mtr.	MR		
	3)Width of internal road	NA	NA	NA		
2	Number, Width Type & Ar			101		
	A. Number of staircases					
	1. Upper floors	04 Nos.	04 Nos.	MR		
	2. Basements	03 Nos.	03 Nos.& 2 ramps	MR		
	B. Width of staircase		-			
	1. Upper floors	1.8 & 1.5 mtr.	02 nos. 1.8 mtr. & 02 Nos. 1.5 mtr.	MR		
	2. Basements	1.8 & 1.5 mtr.	01 nos. 1.8 mtr. 02 nos. 1.5 mtr. & 2 ramps	MR		
	C. Protection of exits					
	1. Fire check door	Required	Provided	MR		
	2. Pressurization	Required	Provided	MR		
	D. No. of continuous	02	02	MR		
	staircase to terrace					
	E. Width of corridor	N/A	N/A	N/A		
	F. Door size	1200 mm	1200 mm	MR		
3	Compartmentation					
	1) Fire check door	Required	Provided	MR		
	2) Sealing of electrical shafts	Required	Provided	MR		
	3) Fire rating of shaft door	Required	Provided	MR		
	4) Water curtain	N/A	N/A	N/A		
	5) Fire Dampers	N/A	N/A	N/A		
4	Smoke Management System					
	1) Basements	30 ACPH	Provided	MR		
	2) Upper floors	12ACPH	Provided	MR		
5	Fire Extinguishers					
	1) Total numbers	50	52	MR		
	2) Types	ABC & CO2	ABC & CO2	MR		
	3) ISI marking	Required	Provided	MR		
1						
6	First-Aid Hose Reel	-				

M116

	floor					
	2) Length of hose reel hose	and the second sec	30 mm	MR		
	3) Nozzle diameter	05 mm	05 mm	MR		
7						
	1) Type of detectors	Required	Provided	MR		
	2) Location of main panel	Required	Provided	MR		
	3) Location of repeater pan		Provided	MR		
	4) Alternate source of powe		Provided	MR		
0	5) Hooter's Location	Required	Provided	MR		
8	MOEFA	Required	Provided	MR		
9	Public Address System	Required	Provided	MR		
10	Automatic Sprinkler System					
	1) Basement	Required	Provided	MR		
	2) Upper floors	Required	Provided	MR		
	3) Sprinkler above false ceiling	N/A	N/A	N/A		
11	Internal Hydrants					
	1) Size of riser/down-comer	150 mm	150 mm	MR		
	2) Number of hydrants per	03	03	MR		
	floor					
	3) Hose box	03	03	MR		
12	Yard Hydrants	I				
	1) Total number of hydrants	04	04	MR		
	2) Hose box	04	04	MR		
13	Pumping Arrangement					
	1) Ground level					
	a) Discharge of main	2850 LPM	2850 LPM	MR		
	pump	2000 2111	2000 2111			
	b) Head of main pump	70 mtr.	70 mtr.	MR		
	c) Number of main	02	02	MR		
	pump					
	d) Jockey pump out put	220 LPM	220 LPM	MR		
	e) Jockey pump head	70 mtr.	70 mtr.	MR		
	f) Stand by pump	2850 LPM	2850 LPM	MR		
	output					
	g) Stand by pump head	70mtr.	70mtr.	MR		
	h) Auto starting/Manual	Required	Provided	MR		
	stopping					
	2) Terrace level					
	a) Discharge of pump	N/A	N/A	N/A		
	b) Head of pump	N/A	N/A	N/A		
	c) Power supply	N/A	N/A	N/A		
	d) Auto starting of	N/A	N/A	N/A		
	pump					
4	Captive Water Storage for F	ire Fighting	1			
-+	1) Underground tank capacity	1,00,000 ltr.	1,00,000 ltr.	MR		
	a) Draw-off connection	N/A	N/A			
	b) Fire service inlet	N/A	N/A N/A	N/A		
				N/A		
	c) Access to tank	N/A	N/A	N/A		
	d) Over head tank	20000 ltr.	20000 ltr.	MR		
	capacity					
	Exit Signage.	Required	Provided	MR		

8

MIID

16	Provision of Lifts				
	a) Pressurization of lift shaft	Required	Provided	MR	
	 b) Pressurization of lift lobby 	Required	Provided	MR	
	c) Communication in lift car	Required	Provided	MR	
	d) Fireman's switch	Required	Provided	MR	
	e) Lift signage	Required	Provided	MR	
17	Standby Power Supply	Required	Provided	MR	
18	Refuge Area	N/A	N/A	N/A	
	Total area location	N/A	N/A	N/A	
19	Fire Control Room				
	a) Detector system panel	Required	Provided	MR	
	b) Flow switch panel	Required	Provided	MR	
	c) PA system panel	Required	Provided	MR	
	d) Battery backup	Required	Provided	MR	
	e) Building floor plan	Required	Provided	MR	
20	Special Fire Protection Syste Risk, if any: Local Co2 flood	MR			

The fire protection systems provided in the building were randomly tested, checked and found functional at the time of inspection.

In view of the deemed compliance of the minimum standards of fire prevention and fire safety measures as required under the rules of DFS Rules 2010, the FSC/NOC issued vide letter no. F6/DFS/MS/NDZ/2017/1393 dated 21/09/17, renewal under rule 35 of the Delhi Fire Service rules 2010, is recommended for approval.

Signature of the Inspecting Officer

22 Name :- Sh. Rajinder Atwal Designation :- DO (CD)

o (DADZ)

Signature of the Inspecting Officer


Name :- Sh. Ravinder Singh Designation : ADO (CC)

Service

01425

Fire

FD

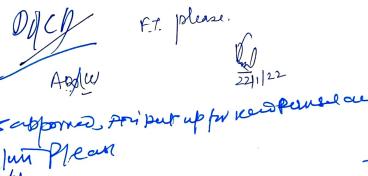

0