

GOVERNMENT OF NATIONAL CAPITAL TERRITORY OF DELHI HEAD QUARTERS: DELHI FIRE SERVICE: CONNAUGHT PLACE NEW DELHI-110001

No. F.6 DFS/MS/School/2022/SZ/ 1263

Dated: 25/11/2022

FIRE SAFETY CERTIFICATE

Certified that **Sarvodaya Kanya Vidyalaya**, at Mandi Village, New Delhi (School ID 1923064) comprised of New Block, Ground plus Three upper floors (interconnected with old SKV Block) owned/occupied by Directorate of Education, Govt. of NCT of Delhi have complied with the fire prevention and fire safety requirements in accordance with rule 33 of the Delhi Fire Service Rules, 2010 and verified by officer concern of this department on 01/11/2022 in the presence of Mr. Dinesh Kumar and that the premises is fit for occupancy class "Educational, Group-B" (School) as above with effect from 25/11/2022 for period of Three years in accordance with Rule 36 unless renewed under Rule 37 or sooner cancelled under Rule 40 and subject to compliance of the conditions under Rule 38 of the Delhi Fire Service Rules, 2010.

Issued on 25/11 2022 at New Delhi by

Copy to: -

1. The Assistant Engineer (E) Edu. Maint. Sub-div-M1, PWD, Hauz Khas, New Delhi 110016.

Conditions for the validity of Fire Safety Certificate

- 1. All the means of escape/entry/exit shall be kept free from any obstruction.
- 2. All the fire safety arrangements provided therein shall be maintained in good working condition at all time as seen during inspection. Any loss of life or property due to non-functional fire safety measures shall be at the responsibility of the management.
- 3. All the staff members must know the correct method of operation of firefighting system.
- 4. This certificate cannot be treated as regularization of unauthorized construction, if any
- The owner/ occupier shall submit a declaration every year in Form 'K' provided in the first schedule of Delhi Fire Service Rules 2010. The form is available on www.dfs.delhigovt.nic.in
- This fire safety certificate may not in any way be treated as regularization (Clause 2.8 of UBBL-2016) of unauthorized construction or Alteration (Clause 1.4.3 of UBBL-2016), if any.
- 7. "The owner/occupier shall apply for renewal of this Fire Safety Certificate to the Director in Form 'J' [sub rule (1) of rule 37] along with a copy of this Certificate, six months prior to its expiry."

NIIZ



1	Name & Address of the Building	Sarvodaya Kanya Vidyalaya, Mandi Village, No				
2	Type of Occupancy	Delhi (School ID 1923064)				
3	Building Comprised of	Educational, Group-B New Building Blocks, G + 3 Upper Floo				
-	2 and ng comprised of	interconnected v		oper Floor		
4	Type of Case	New Case	vith old block			
5	Details of Previous NOC		ool/2021/SZ/138 dated 18	/02/2021 for		
		SKV Mandi, (ID -1923064)				
6	Fire Safety Directives Letter No	NBC/UBBL 2016				
7	Date of Inspection	10-11-2022				
8	Name of the Inspecting Officers	Sh. Rajesh Kumar ADO (BCP)				
9	Name & Designation of Officers	Mr. Dinesh Kumar				
	from the building side					
10	Year of construction	2019				
11	Applicant letter No.	54(SPS-School)PWD/Edu./Maint./Sub-Div/M-1-				
		3/2022-23/camp 03 dated 29/09/2022				
S. No	Minimum standards on Fire Prevention	UBBL-2016	Provided at Site	Remarks		
	and Fire Safety U/R 33	requirements		MR/NMR		
1	Access to Building.					
	 Road width 	Required	9 mtr	MR		
	Gate width	-NA-	-NA-	-NA-		
	 Width of internal road 	-NA-	-NA-	-NA-		
2	Number, width, type & arrangement of exits.					
	a) Number of Staircase					
	Upper floors	02 Nos	01 No + 02 (old Blocks)	MR		
	Basement floor	-NA-	-NA-	-NA-		
	b) Width of Staircase					
	> Upper floors	1.50 m each	1.70 m & 1.82 & 1.80m	MR		
	Basement floor	-NA-	-NA-	-NA-		
	c) Protection of exits					
	 Fire check door 	-NA-	-NA-	-NA-		
	 Pressurization 	-NA-	-NA-	-NA-		
		02 Nos	Provided	MR		
	d) No. of continuous staircase to terrace	-NA-	-NA-	-NA-		
	e) Width of corridor		1.2 mtr	MR		
	1 Door size	1.2 mtr	1.2 mu			
3	Compartmentation.					
		-NA-	-NA-	-NA-		
	• Fire check door.	-NA-	-NA-	-NA-		
	Sealing of electrical shafts	-NA-	-NA-	-NA-		
	Fire rating of shaft door.	-NA-	-NA-	-NA-		
	Water curtain	-NA-	-NA-	-NA-		
	Fire dampers.					
4.	Smoke Management system.	-NA-	-NA-	-NA-		
	Basement	-NA-	-NA-	-NA-		
	Upper floors					
5.	Fire Extinguishers.	54 No's	66 Nos	MR		
	Total numbers	ABC / co2	ABC / Co2 Type	MR		
	• Types	ISI mark	Provided	MR		
	ISI Marking	151 Шак	monded			
6.	First Aid Hose Reels.	02 at each	03 Nos per floor	MR		
	Total numbers on each floor.	30 mm	Provided	MR		
	 Length of hose-reel hose. 			MR		
	Nozzle Diameter	5 m	Provided	MR		
	Automatic fire detection & alarming system.					
7	The of detectors	-NA-	-NA-	-NA-		
	Type of detectorsLocation of Main Panel	-NA-	-NA-	-NA-		
1	 Location of Main Panel 		-NA-	-NA		
	Documentary Devel	-NA-				
	 Location of Repeater Panel Alternate source of power 	-NA- -NA-	-NA-	-NA-		

	NUS	3		
	N		11	
			10.5	
	NAME A			in the second
8. 9.		-NA-	-NA-	
9.	- and the state of stelling	-NA-	-NA-	-NA-
10.	Automatic Sprinkler System Basement			-NA-
	BasementUpper floors	-NA-	-NA-	NIA
		-NA-	-NA-	-NA-
11.	Sprinkler above false ceiling Internal Hydrants.	-NA-	-NA-	-NA-
				-NA-
	Size of Riser Down-comer	-NA-	-NA-	
	 Number of Hydrant per floor 	-NA-	-NA-	-NA-
12.	Hose box	-NA-	-NA-	-NA-
14.	and a second sec			-NA-
	• Total number of hydrants.	-NA-	-NA-	
12	Hose box	-NA-	-NA- -NA-	-NA-
13.	an angements.		-11/1-	-NA-
	Ground Level			_
	Discharge of main pump.	-NA-	NT A	
	Head of main pump.	-NA-	-NA-	-NA-
	Number of main pumps.	-NA-	-NA-	-NA-
	Jockey Pump output.	-NA-	-NA-	-NA-
	Jockey Pump head.	-NA-	-NA-	-NA-
	 Standby Pump output. 	-NA-	-NA-	-NA-
	Standby Pump head.	-NA- -NA-	-NA-	-NA-
	Auto Starting / Manual Stopping.	-NA- -NA-	-NA-	-NA-
	 Pump house access. 	-NA- -NA-	-NA-	-NA-
	Terrace Level		-NA-	-NA-
	Discharge of pump.	2 x 450 LPM	ngement available at	
	Head of pump.		Provided	MR
	Power supply.	40 m	Provided	MR
/	 Auto starting of pump. 	Required	Provided	MR
14.	Captive water storage for fire fighting.	Required	Provided	MR
	Underground tank capacity.	-NA-	ngement available at	
J	 Draw-off connection. 	-NA- -NA-	-NA-	-NA-
1	 Fire Service Inlet. 	-NA- -NA-	-NA-	-NA-
1	 Access to tank. 	-NA- -NA-	-NA-	-NA-
	 Overhead tank capacity. 		-NA-	-NA-
15.	Exit Signage.	10,000 ltrs each	Provided	MR
15. 16.	Provision of Lifts.	Required	Provided	MR
10.	 Pressurization of lift shaft. 	-NA-	NT A	
			-NA-	-NA-
	 Pressurization of lift lobby. Communication in lift corr 	-NA-	-NA-	-NA-
	Communication in lift car.	-NA-	-NA-	-NA-
	• Fireman's switch.	-NA-	-NA-	-NA-
	Lift signage.	-NA-	-NA-	-NA-
	Standby Power Supply	-NA-	-NA-	-NA-
1 8.	Refuge Area			
	Total area	-NA-	-NA-	-NA-
	Location	-NA-	-NA-	-NA-
19.	Fire Control Room.			
9		-NA-	-NA-	-NA-
	Detector system panel.			
	• Flow switch panel.	-NA-	-NA-	-NA-
	PA system panel	-NA-	-NA-	-NA-
	 Battery backup. 	-NA-	-NA-	-NA-
	 Building floor plan. 	-NA-	-NA-	-NA-
0. S	Special Fire Protection System for the Protection of special Risk, if any.	-NA-	-NA-	-NA-

The fire protection system provided in the building were randomly checked and found functional at the time of inspection.

Keeping in view of the substantially satisfactory compliance of the minimum standards on fire prevention and fire safety measures as required under the rules, it is recommended to issue Fire Safety Certificate under rule 35 (3) of the Delhi Fire Service Rules, 2010

Accordingly, DFA is put up for approval and signature please.


Ten CO

-NA

-N

311

Signature of the Inspecting Officer Name: Sh. Rajesh Kumar Design: ADO (BCP)

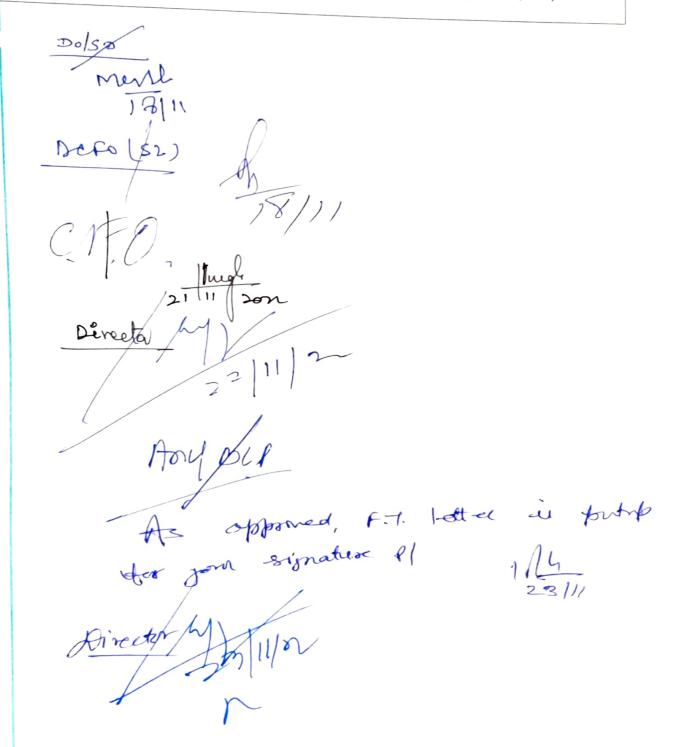

N (14