

**GOVERNMENT OF NATIONAL CAPITAL TERRITORY OF DELHI
HEADQUARTERS: DELHI FIRE SERVICE: CONNAUGHT PLACE**

No. F.6/DFS/MS/EH/2023/SZ/314
NEW DELHI-110001

Dated 30/06/2023

FIRE SAFETY CERTIFICATE

Certified that Eating House in the Name & Style of M/s Karnataka Food Centre located at Delhi Karnataka Sangha Building, Ground Floor, Sector 12, Rao Tula Ram Marg, R.K. Puram, New Delhi 110022 in the building comprised of Ground plus 03 upper floor owned/occupied by Delhi Karnataka Sangha have complied with the fire prevention and fire safety requirements in accordance with rule 33 of the Delhi Fire Service Rules, 2010 and verified by the officers concerned of this department on 21/06/2023 on in the presence of Mr. Sharif (Estate Manager) and that the premise is fit for occupancy class **Group-D Assembly Building** (Restaurant running at GF only) and **validity upto 31/03/2026** in accordance with rule 36 unless renewed under rule 37 or sooner cancelled under Rule 40 and subject to compliance of the conditions under rule 38 of the Delhi Fire Service Rules, 2010.

Issued on 30/06/2023 at New Delhi by

(ATUL GARG)
DIRECTOR
DELHI FIRE SERVICE

Copy to: -

1. The Dy. Health Officer, Public Health Department, South Zone, Aurobindo Marg, Green Park, Delhi-110016 (Ref. MHA Portal No. 2023050908502 dated 09/05/2023)

Conditions for the validity of Fire Safety Certificate: -

1. All the means of escape/entry/exit shall be kept free from any obstruction.
2. All the fire safety arrangement provided therein shall be maintained in good working condition at all time as seen during inspection. Any loss of life property due to non-functional fire safety measures shall be at the responsibility of the management.
3. All the staff members must know the correct method of operation of fire fighting system.
4. The owner/occupier shall submit a declaration every year in form 'K' provided in the first schedule of Delhi Fire Service Rules 2010. The form is available on www.dfs.delhigovt.nic.in
5. This fire safety certificate may not in any way be treated as regularization (Clause 2.8 of UBBL-2016) of unauthorized construction or alteration (Clause 1.4.3 of UBBL-2016), if any.
6. "The owner/occupier shall apply for renewal of this Fire Safety Certificate to the Director in form 'J' [sub rule (I) of rule 37] along with a copy of this Certificate, six month prior to its expiry."

INSPECTION REPORT

| 1 | Name & Address of the Building | M/s Karnataka Food Centre located at Delhi Karnataka Sangha Building, Ground Floor, Sector 12, Rao Tula Ram Marg, R.K Puram, New Delhi 110022 | | |
|--------|---|---|--------------------------|----------------|
| 2 | Type of Occupancy | Group-D Assembly Building. (Eating House) | | |
| 3 | Building Comprised of | Basement, Ground plus Three upper floors | | |
| 4 | Type of Case | New Case | | |
| 5 | Details of Previous NOC | Nil | | |
| 6 | Fire Safety Directives Letter No | F6/DFS/MS/Bldg/2020/SZ/251 dated 16/07/2020 building NOC | | |
| 7 | Date of Inspection | 21/06/2023 | | |
| 8 | Name of the Inspecting Officers | DO (South) & ADO (BCP) | | |
| 9 | Name & Designation of Officers from the building side | Mr. Sharif (Estate Manager) | | |
| 10 | Year of construction | 2005 Restt. Running at Ground floor only | | |
| 11 | Applicant letter No. | MHA Portal No. 2023050908502 dated 09/05/2023 | | |
| S. No. | Minimum standards on Fire Prevention and Fire Safety U/R 33 | Circular date | Provided at Site | Remarks MR/NMR |
| 1 | Access to Building. | | | |
| | • Road width | 9 m | Provided | MR |
| | • Gate width | N/A | NA | N/A |
| | • Width of internal road | N/A | N/A | N/A |
| 2 | Number, width, type & arrangement of exits. | | | |
| | a) Number of Staircase | Restt. at GF only ✓ | | |
| | ➤ Upper floors. | N/A | NA | N/A |
| | ➤ Basement floor. | N/A | NA | N/A |
| | b) Width of Staircase | | | |
| | ➤ Upper floors | N/A | NA | N/A |
| | ➤ Basement floor | N/A | N/A | N/A |
| | c) Protection of exits | | | |
| | ➤ Fire check door | N/A | NA | N/A |
| | ➤ Pressurization | N/A | N/A | N/A |
| | d) No. of continuous staircase to terrace | N/A | NA | N/A |
| | e) Width of corridor | N/A | N/A | N/A |
| | f) Door size | 02 Exits | Provided | MR (old case) |
| 3 | Compartmentation. | | | |
| | • Fire check door. | N/A | NA | N/A |
| | • Sealing of electrical shafts. | N/A | NA | N/A |
| | • Fire rating of shaft door. | N/A | NA | N/A |
| | • Water curtain | N/A | N/A | N/A |
| | • Fire dampers. | N/A | N/A | N/A |
| 4 | Smoke Management system. | | | |
| | • Basement | NA | N/A | N/A |
| | • Upper floors | NA | N/A | N/A |
| 5 | Fire Extinguishers. | | | |
| | • Total numbers | 04 Nos | 05 Nos | MR |
| | • Types | ABC/CO ₂ | ABC- & CO ₂ - | MR |
| | • ISI Marking | ISI marked | Provided | MR |
| 6 | First Aid Hose Reels. | | | |
| | • Total numbers on each floor. | One | Provided | MR |

| | | | | |
|----|--|--|---------------|-----|
| | <ul style="list-style-type: none"> Length of hose-reel hose. Nozzle Diameter | 30m | Provided | MR |
| | | 5mm | Provided | MR |
| 7 | Automatic fire detection & alarming system. | | | |
| | <ul style="list-style-type: none"> Type of detectors Location of Main Panel Location of Repeater Panel Alternate source of power Hooter's location | N/A | N/A | N/A |
| | | N/A | N/A | N/A |
| | | N/A | N/A | N/A |
| | | N/A | N/A | N/A |
| | | N/A | N/A | N/A |
| 8 | MOEFA | Required | Provided | MR |
| 9 | Public Address System | N/A | N/A | N/A |
| 10 | Automatic Sprinkler System | | | |
| | <ul style="list-style-type: none"> Basement Ground/ upper floors. Sprinkler above false ceiling | N/A | N/A | N/A |
| | | N/A | N/A | N/A |
| | | N/A | N/A | N/A |
| 11 | Internal Hydrants. | | | |
| | <ul style="list-style-type: none"> Size of Riser/Down-comer Number of Hydrant per floor Hose box. | 100 mm | Provided | MR |
| | | 01 Nos | Provided | MR |
| | | 01 Nos | Provided | MR |
| 12 | Yard Hydrants. | | | |
| | <ul style="list-style-type: none"> Total number of hydrants. Hose box. | N/A | N/A | N/A |
| | | N/A | N/A | N/A |
| 13 | Pumping arrangements. | | | |
| | Ground Level | Pumping arranging common with Building | | |
| | <ul style="list-style-type: none"> Discharge of main pump. Head of main pump. Number of main pumps. Jockey Pump output. Jockey Pump head. Standby Pump output. Standby Pump head. Auto Starting/Manual Stopping. Pump house access. | N/A | 2850 LPM | N/A |
| | | N/A | 70m | N/A |
| | | N/A | 01 No | N/A |
| | | N/A | 180 LPM | N/A |
| | | N/A | 70m | N/A |
| | | N/A | 2850 LPM | N/A |
| | | N/A | 70m | N/A |
| | | N/A | Provided | N/A |
| | | N/A | Provided | N/A |
| | Terrace Level | | | |
| | <ul style="list-style-type: none"> Discharge of pump. Head of pump. Power supply. Auto starting of pump. | 450 LPM | Provided | MR |
| | | 40m | Provided | MR |
| | | Required | Provided | MR |
| | | Required | Provided | MR |
| 14 | Captive water storage for fire fighting. | | | |
| | <ul style="list-style-type: none"> Underground tank capacity. <ul style="list-style-type: none"> Draw-off connection. Fire Service Inlet. Access to tank. Overhead tank capacity. | N/A | 1,00,000 ltrs | N/A |
| | | N/A | Provided | N/A |
| | | N/A | Provided | N/A |
| | | N/A | Provided | N/A |
| | | 10,000 Ltrs | 15,000 ltr | MR |
| 15 | Exit Signage. | Required | Provided | MR |
| 16 | Provision of Lifts. | | | |
| | <ul style="list-style-type: none"> Pressurization of lift shaft. Pressurization of lift lobby. Communication in lift car. Fireman's switch. Lift signage. | N/A | N/A | N/A |
| | | N/A | N/A | N/A |
| | | N/A | N/A | N/A |
| | | N/A | N/A | N/A |
| | | N/A | N/A | N/A |
| 17 | Standby Power Supply | N/A | N/A | N/A |
| 18 | Refuge Area | N/A | N/A | N/A |


N/23

| | | | | |
|----|---|-----|-----|-----|
| | • Total area | N/A | N/A | N/A |
| | • Location | N/A | N/A | N/A |
| 19 | Fire Control Room. | | | |
| | • Detector system panel. | N/A | N/A | N/A |
| | • Flow switch panel. | N/A | N/A | N/A |
| | • PA system panel. | N/A | N/A | N/A |
| | • Battery backup. | N/A | N/A | N/A |
| | • Building floor plan. | N/A | N/A | N/A |
| 20 | Special Fire Protection System for the Protection of special Risk, if any. | N/A | N/A | N/A |

The fire protection system provided in the building were randomly checked and found functional at the time of inspection.

Keeping in view of the substantially satisfactory compliance of the minimum standards on fire prevention and fire safety measures as required under the rules, it is recommended to issue Fire Safety Certificate under rule 35 (3) of the Delhi Fire Service Rules, 2010

Accordingly, DFA is put up for approval and signature please.



Signature of the Inspection Officer
Name: Sh. M.K. Sharma
Designation: DO (South)

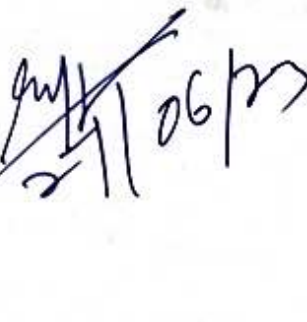


Signature of the Inspecting Officer
Name: Sh. Rajesh Kumar
Designation: ADO (BCP)

CFO (HQ)


27/6/2023

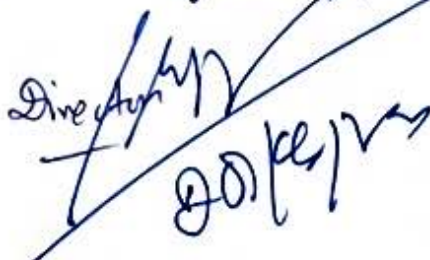
Director


27/6/23

FT P/L



As approved, F.T. letter is put up for your signature pl


28/6/23

1/1/5
28/6



